

## Guarantee of quality and reliability

To cater to the popular segment in the growing market for wooden laminate floorings, Uniproducts presents Urtext laminate floorings, sourced after considerable and painstaking effort to ensure benchmark quality, offers customers the best value for money within the popular segment.

The Urtext range is available in Usage Class 31/Abrasion Class AC 3 and Usage Class 32/Abrasion Class AC 4 (8.2 mm thickness). This product is available in a wide array of attractive decors, ideally suitable for homes and institutions alike.



Better technology, better flooring

Decor (Color and texture)




Hickory



Oak Full Plank



Cherry Full Plank

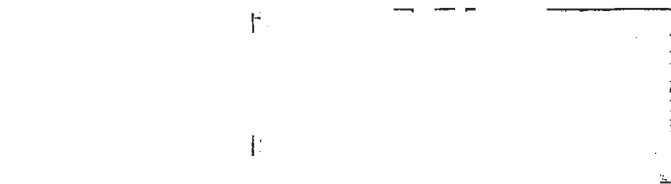

Teak Barneo




Nevada Oak

Dimensions : 1290 x 194 x 8 mm


Box contents : 8 pieces = 2,002m<sup>2</sup>

Pallet contents : 56 boxes = 112,11m<sup>2</sup>


Decor (Color and texture)

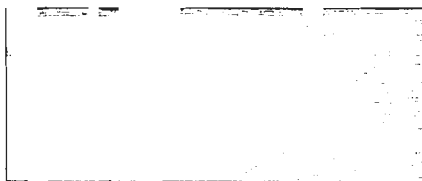


Oak Verona

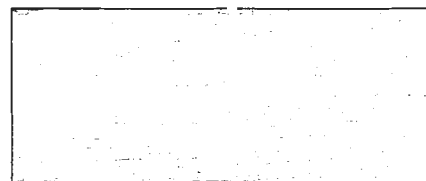

Pecan Full Plank

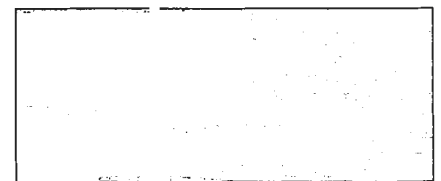


Sessile Oak



Chocolate



Mahogany

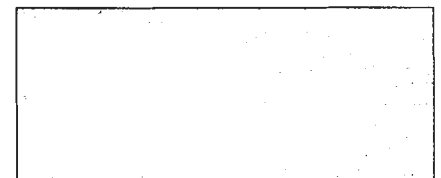

Walnut Full Plank

Dimensions : 1290 x 194 x 8 mm


Box contents : 8 pieces = 2,002m<sup>2</sup>

Pallet contents : 56 boxes = 112,11m<sup>2</sup>







Technical specifications		Technical specifications	
	EN 13329	EN 13329	EN 13329
Abrasion resistance	EN 13329	AC3	AC3
Shock resistance	EN 13329	C1	C2
Resistance to cigarette burn	EN 438-2.18	Degree 4	Degree 4
Light fastness	EN 438-2.16	Blue wool scale level 6	Blue wool scale level 6
Resistance to staining	EN 438-2.15	Process A - level 5	Process A - level 5
Resistance to lifting	EN 311	>= 1 N/mm <sup>2</sup>	>= 1 N/mm <sup>2</sup>
Edges swelling	EN 13329	<= 18%	<= 18%
Edges squareness of top layer	EN 13329	max. <=0,3mm/m	max. <=0,3mm/m
Height differences between elements put together	EN 13329	<=0,10mm	<=0,10mm
Squareness of the elements	EN 13329	max. <=0,15mm	max. <=0,15mm
Flatness of the elements	EN 13329	max. <=0,2mm	max. <=0,2mm
		Width:	Width:
		Concave max. <=0,15%	Concave max. <=0,15%
		Convex max. <=0,20%	Convex max. <=0,20%
		Length:	Length:
		Concave max. <=0,50%	Concave max. <=0,50%
		Convex max. <=1,00%	Convex max. <=1,00%

We guarantee the approximate exactness of our decor pigmentation under the discharge of artificial light D50 (CIE D 50, ANSI PH 2.30, ISO 3664) and D65 (CIE D 65)

# Laminate Flooring Structure by using together four separate layers.

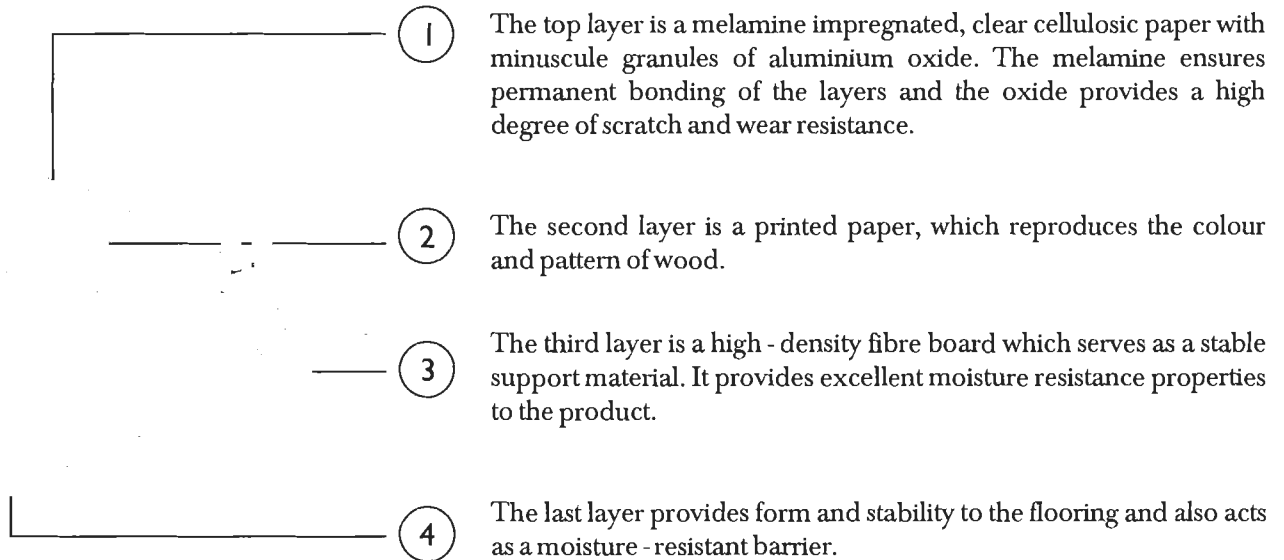

## Surface Characteristics



## Laminate Accessories



ISO/TS 16949 : 2002, ISO 14001:2004, OHSAS - 18001:2007

## UNIPRODUCTS (INDIA) LTD.

Admn. Office : C-15, Sector-57, NOIDA (U.P.) 201 307 India. Tel. : 0120-2585590/91, 2587176-77 Fax : 0120-2585031  
Customer Care No. : 9310066187 E-mail : uniproducts@unitexindia.com Website : www.unitexindia.com

### Branch Offices :

**Mumbai** : Bajrang Warehouse, Plot No. A/2, Mafco Yard, Sector-18, Opposite Wibs Bread Factory, Next to Tangent Furniture Mall, Vashi, Navi Mumbai-400705  
Ph. No. : 022-27802054 E-mail : uniproductsmumbai@unitexindia.com  
**Bangalore** : No. 9, Ground Floor, Jayswal Bhavan, 9th Main, 13th Cross, Vasantnagar, Bangalore-560052  
Ph. No. : 09900001016 E-mail : upilbangalorestd@unitexindia.com